

FIREPOWER

WHS09

WIRELESS GAMING HEADSET

INSTRUCTION MANUAL
ADXWHS0925



Contents

Safety Warnings	3
Unpacking	6
Product Overview	7
Main Unit	7
Dongle.....	7
Charging the Headset	8
Powering On/Off	9
Bluetooth® Pairing	9
Pairing with Dongle	10
Audio Cable Connection	11
Operating with Detachable Microphone	11
Headset Operations	12
Clear Paired Devices	12
Hints and Tips	13
Specifications	13
Headset	13
Built-in Battery.....	14

Safety Warnings

Read all the instructions carefully before using the unit and keep them for future reference. Retain the manual. If you pass the unit onto a third party, make sure to include this manual.

Earphones / Headphones

- Listening to loud sounds for prolonged periods of time may permanently damage your hearing.
- Before putting on earphones / headphones, turn the volume down then put the earphones / headphones on and slowly increase the volume until you reach a comfortable listening level.
- For traffic safety, do not use earphones / headphones while driving or cycling.

Damage

Please inspect the unit for damage after unpacking.

Do not continue to operate the unit if you are in any doubt about it working normally, or if it is damaged in any way - switch off, unplug from the mains socket and consult your dealer.

Wireless Devices

- Wireless devices can transmit radio frequency (RF) energy, whenever batteries are installed and the wireless device is turned on (If it has an On/Off switch).

Temperature

- Avoid extreme degrees of temperature, either hot or cold. Place the unit well away from heat sources such as radiators or gas / electric fires.
- Avoid exposure to direct sunlight and other sources of heat.

Naked Flames

- Never place any type of candle or naked flame on the top of or near the unit.

Interference

- Do not place the unit on or near appliances which may cause electromagnetic interference. If you do, it may adversely affect the working performance of the unit, and cause a distorted sound.

Battery-Powered Devices

- Always charge in a well ventilated area. Do not charge under pillows, blankets or on

flammable surfaces.

- Do not operate the product if it has been wet or otherwise damaged, to prevent against electric shock, explosion and/or injury. Contact the dealer or authorized agent.
- Disposal of battery into fire or a hot oven, or mechanically crushing or cutting of a battery, can result in explosion.
- Leaving a battery in an extremely high temperature environment can result in explosion or leakage of flammable liquid or gas.
- A battery subjected to extremely low air pressure may result in an explosion or leakage of flammable liquid or gas.
- Do not short-circuit the product or store it in a receptacle where it may be short-circuited by other metallic or conductive objects.
- Improper use of batteries may result in battery fluid leakage, overheating or explosion.
- Do not disassemble the product or remove any parts.
- Never discharge a Li-ion battery at a rate exceeding the maximum discharge current specified for that battery.
- Immediately discontinue use of the battery if, while using or charging the battery emits an unusual smell, feels hot or appears abnormal in any other way.
- Do not use the product where strong electromagnetic waves are present. Strong electromagnetic waves will cause damage to the product.
- Do not use the product if the temperature is too high or too low, your batteries may be damaged. If the humidity is too high, your batteries may be damaged.
- When the product is charging, keep it away from direct sunlight, moisture, dirt or abrasive chemical products (cleaning products etc.).
- Battery life and charge cycles may vary by use and settings.

Built-in Battery Care

Rechargeable Lithium Ion batteries are potentially hazardous and can present a serious FIRE HAZARD if damaged, defective or improperly used.

- Your product is powered by a built-in rechargeable battery.
- The battery can be charged and discharged hundreds of times, but will eventually wear out.
- Unplug the charger from the electrical plug and the product when not in use.
- Do not leave a fully charged battery connected to a charger, since overcharging may shorten its lifetime.
- If left unused, a fully charged battery will lose its charge over time.
- Leaving the product in hot or cold places, such as in a closed car in the summer and winter conditions, will reduce the capacity and lifetime of the battery.
- Always try to keep your device in a cool, moisture-free environment that's less than 32°C. A product with a hot or cold battery may not work temporarily, even when the battery is fully charged. Battery performance is particularly limited in temperatures well below freezing.
- If you plan to store your device for longer than six months, charge the battery for an hour every six months to keep it fresh.
- The unit should be fully recharged after using the device each time. This will keep the lifetime of the battery.

Battery Warning!

- The battery used in this product may present a risk of fire or chemical burn if mistreated.
- Do not attempt to open the product or replace the battery. It is built-in and not changeable. Use of other batteries may present a risk of fire or explosion and the warranty will be terminated.
- Only recharge your battery with the provided approved USB cable designated for this product.
- Dispose of batteries according to local regulations. Please recycle when possible. Do not dispose as household waste or in a fire as they may explode.
- Batteries may explode if damaged.

Proper Disposal

- ALWAYS dispose of batteries according to local, state or federal laws. DO NOT put

Lithium-Ion Batteries in the trash. Consult your local waste authority for information about recycling or disposal options. You may be able to bring Lithium-Ion Batteries and Battery Packs to local stores for proper disposal.



The symbol on the product or its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment.

For more information about where you can drop off your waste for recycling, please contact your local authority, or where you purchased your product.



Notes for battery disposal

The batteries used with this product contain chemicals that are harmful to the environment.

To preserve our environment, dispose of used batteries according to your local laws or regulations. Do not dispose of batteries with normal household waste.

For more information, please contact the local authority or your retailer where you purchased the product.

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Currys Group Limited is under license. Other trademarks and trade names are those of their respective owner.

All trademarks are the property of their respective owners and all rights are acknowledged.



This unit is designed for indoor use only.



This equipment is a Class II or double insulated electrical appliance. It has been designed in such a way that it does not require a safety connection to electrical earth.



AC voltage: This symbol indicates that the rated voltage marked with the symbol is AC voltage.



DC voltage: This symbol indicates that the rated voltage marked with the symbol is DC voltage.

Thank you for purchasing your new product.

We recommend that you spend some time reading this instruction manual in order that you fully understand all the operational features it offers. You will also find some hints and tips to help you resolve any issues.

Read all the safety instructions carefully before use and keep this instruction manual for future reference.

Unpacking

Remove all items from the packaging. Retain the packaging. If you dispose of it please do so according to local regulations.


The following items are included:



Main Unit




USB C Charging Cable



3.5 mm Audio Cable




Detachable Boom Microphone



Dongle


Product Overview

Main Unit

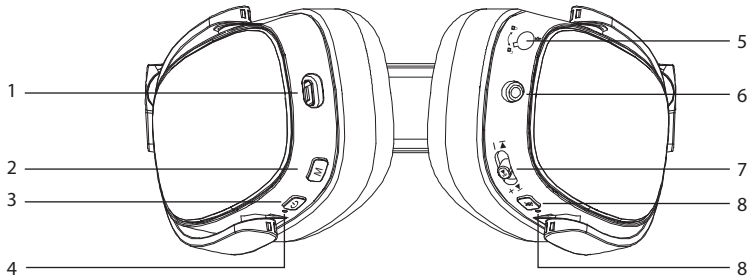

- 1. USB C Charging Port**
- 2. M Mode Button**
Press twice to switch between **Adapter** or **Bluetooth** mode
- 3. ON/OFF Button**
Press and hold to switch on/off the unit.
- 4. LED Status Indicator**
- 5. Microphone Socket**
- 6. 3.5 mm Audio Cable Socket**
- 7. Slide Switch**
- 8. Microphone Button**
Press to switch on/off the microphone.
- 9. Microphone Indicator**

Dongle

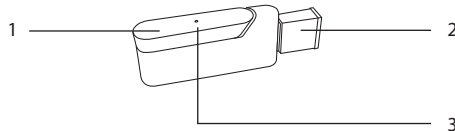


- 1. Removable Type C Dongle**
- 2. USB Plug Cover**
- 3. LED Indicator**

Charging the Headset

Before using the unit for the first time, ensure it is fully charged.

1. Connect the provided USB C Charging Cable to the **USB C Charging Port** on the headset.
2. Plug the other end of the Charging Cable into a powered USB device.

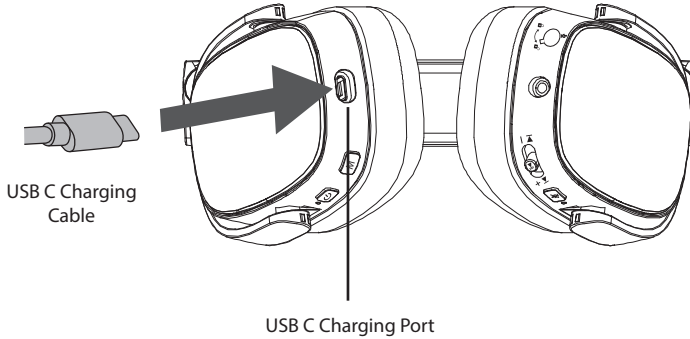

Status	Indicator
Charging	Solid Red
Fully charged	Green
Low Battery	Flashing in Red



The indicator will flash in red once every 2 seconds and the unit will prompt "**Low Battery**" in every 5 minutes when the unit is low battery. Recharge the unit with the provided charging cable.

Powering On/Off

Press and hold **ON/OFF** button until you hear “**Power On**” from the unit.

- If the headset is already paired with a Bluetooth device before, it will automatically connect with the last paired device when both are in pairing mode.

Press and hold **ON/OFF** button again to switch off the unit. You will hear “**Power Off**”. The LED indicator will light up red once, and then turn off.



- Disconnect the charging cable before powering on the unit.
- If the unit will not be used for an extended period, turn off the power to save energy.
- When powering on for the first time without any prior Bluetooth® connections, the headset automatically enter Bluetooth® pairing mode for easy setup.


Bluetooth® Pairing

1. Press **M** Mode button twice to enter Bluetooth mode.
2. The unit will prompt “**Bluetooth mode**”, and the LED indicator will flash in red and blue.
3. Enable the Bluetooth feature on your device and start searching. Then select “**ADXWHS0925**”.
4. Upon successful pairing, you will hear “**Connected**,” confirming that your headset are connected and ready to use.



- The operational range between the unit and the device is approximately 1 metre.
- Any obstacle between device and the unit can reduce operational range.
- If no Bluetooth device is paired within 5 minutes, the headset will switch off automatically.
- After powering off and on, the headset auto-connects to the last paired device.
- To connect a new device, make sure the currently connected device is unpaired.

Pairing with Dongle

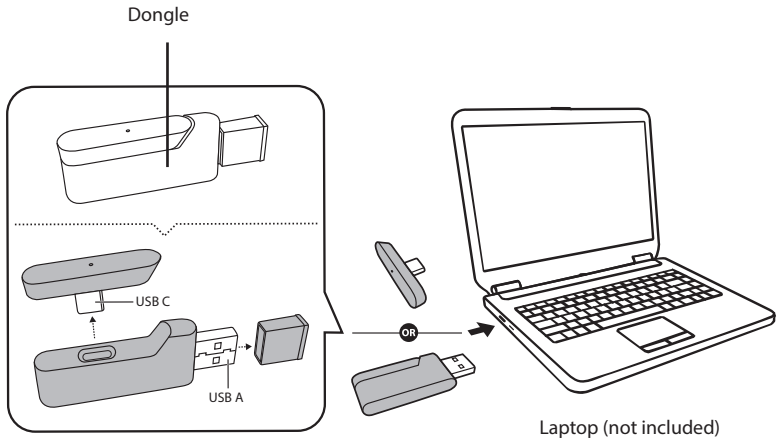


You may choose using **USB C** or **USB A** plug for Dongle Connection.



If you want to connect the dongle with USB A plug to your device, make sure that the USB C plug is reattached with the main dongle.


1. Press **M** Mode button twice to enter adapter mode. The unit will prompt "**Adpater mode**".
2. While waiting connection, the unit's indicator light will flash in red and green. After successful connection, the unit will prompt "**Connected**", and the headphone indicator light up green.

Audio Cable Connection

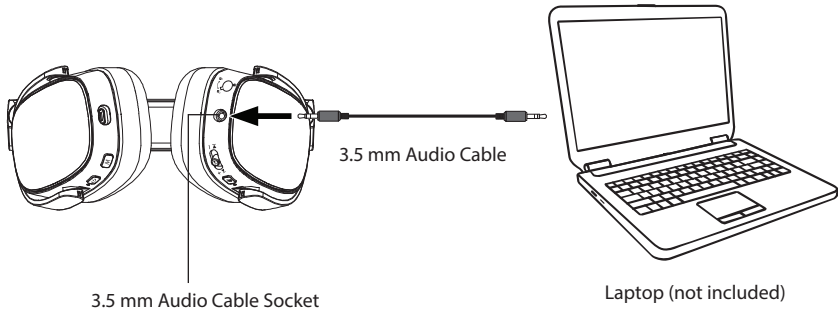





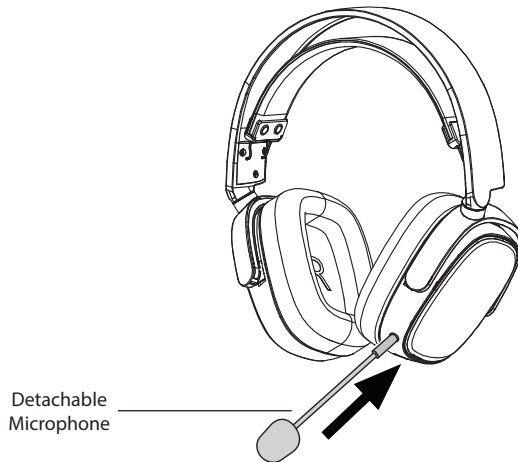


- When using the 3.5 mm audio cable connection, Bluetooth® functionality is disabled. To control playback and call function, use your connected device directly.
- Make sure that you have securely locked the audio cable during connection.

Operating with Detachable Microphone



- Make sure that the microphone is securely connected to the headset by aligning the plug shape with the microphone's socket.

Headset Operations

To	Action
Call Function	
Switch on/off the microphone	Press the  microphone button once.
Answer / end a call	Press the  microphone button twice.
Answer / end a new incoming call (and hold the current call)	Press the  microphone button three times.
Reject a call	Press and hold the  microphone button for about 1.5 second.
Playback Function	
Increase volume	Move the slide control to + position.
Decrease volume	Move the slide control to – position.
Play / pause track	Press the  slide control once.
Skip to next track	Move the slide control to  position and hold for about 1.5 second.
Go to previous track	Move the slide control to  position and hold for about 1.5 second.



- Make sure that the microphone is connected with the headset while using Call Function.
- Not compatible with all brands; please check your individual smartphone user manual.
- When the volume reaches maximum / minimum level, the unit will prompt a beep sound.
- The Call Function is not applicable in **Adapter** mode.

Clear Paired Devices

1. Press and hold the **M** Mode button for about 5 seconds to clear all paired devices in the unit.
2. The status indicator will flash in white for 3 times, and the unit will prompt “**Cleared Pairing List**” After all the paired devices are cleared, the unit will prompt “**Disconnected**”.

Hints and Tips

If the headset is not working:

- Recharge the headset.
- Ensure the headset is powered on.
- Ensure that the wireless function of your Bluetooth-enabled device is active.
- Check for any other wireless devices in discovery mode and turn them off.
- Move the headset closer to your device.
- If the pairing is unsuccessful, please turn off the headset and try re-pairing again.

Specifications

Headset

Model	ADXWHS0925
Bluetooth Version	V5.3
Driver Unit	50 mm
Sensitivity	98±3dB
Impedance	32±15%
Microphone Directivity	Omni Directional
Microphone impedance	2.2k Ω (Max)
Frequency Band(s)	20 Hz - 20KHz
Frequency Range	2400 - 2480 MHz
Max. radio Frequency power transmitted	Earphone: 7 dBm Dongle: 5 dBm
Bluetooth Range	10 m
2.4 G Wireless Range	10 m
Bluetooth Playing Time	Up to 70 hours (70% volume)
Charging Time	Approx. 2 hours
Dimension	192 × 213 × 90 mm
Net Weight	277g ±5g

Built-in Battery

Model	HN503035-2P
Battery Type	Rechargeable Li-ion Polymer Battery
Battery Rating	3.7V 1000 mAh 3.7Wh
Designation Code	1INP5/31/36-2
Manufacturer	DongGuan Hugnen Technology (HGT) Co., Ltd
Dimension (T x W x H)	10.5 × 30.3 × 38 mm
Net Weight	21g

Features and specifications are subject to change without prior notice.

For the latest version of the Safety and Instruction Manual, please visit the official website below (other websites may not contain the full and most updated version):

<https://www.currys.co.uk/services/repairs-maintenance/product-service-manuals.html>



Declaration of Conformity (RER)

Hereby, Currys Group Limited declares that the radio equipment type [ADXWHS0925] is in compliance with Radio Equipment Regulations 2017 (S.I. 2017/1206).

The full text of the UK declaration of conformity is available at the following internet address:

<https://www.currys.co.uk>

Currys.co.uk

All the support you need.

Whether it's a tech emergency or
you need plain good advice, we're
always on hand to help.

UK: 0344 561 1234

IRE: 0818 810575

Partmaster
_____.co.uk

Visit Partmaster.co.uk today for the easiest way to buy electrical spares and accessories.
With over 1 million spares and accessories available we can deliver direct to your door
the very next day. Visit www.partmaster.co.uk or call **0344 800 3456** (UK customers only).
Calls charged at National Rate.

Currys Group Limited (co. no. 504877)
1 Portal Way, London, W3 6RS, UK

EU Representative

Currys Ireland Limited (259460)
3rd Floor Office Suite
Omni Park SC, Santry, Dublin 9, Republic of Ireland